

ELASTO FLEX 410

JOINT AND CRACK SEALANT, FOR ASPHALT AND CONCRETE PAVEMENTS



Elastoflex 410 is a hot applied, polymer modified asphalt crack sealant. This product applies and sets up best in up to moderate temperatures, and is highly durable in cold to hot climates. Elastoflex 410 is quick melting and extremely flexible. Formulated with a high recycled rubber content with a high viscosity to resist excess flow during application, it is ideal for highways and county roads. Elastoflex 410 is a great value for stretching pavement maintenance dollars.

SPECIFICATION


CONE PENETRATION : 77°F (25°C) : ASTM D 5329	100 dmm max
SOFTENING POINT : ASTM D 36	185°F (85°C) min
FLEXIBILITY : 1 in (25mm) mandrel, 90 deg bend, 2s : ASTM D 3111	Pass -20°F (-29°C)
RESILIENCE : 77°F (25°C) : ASTM D 5329	50% min

APPLICATION

Read and follow application instructions before use. This product must be heated using indirect heating methods, either a double boiler or hot oil circulating kettle. Equipment must have means of maintaining constant agitation to the material. Maximum safe heating temperature: 400°F (204°C). Recommended application temperature: 380°F (193°C).

WARRANTY

Warranty: Maxwell Products, Inc. warrants that our products meet the applicable specifications at the time of shipment. Due to the many differing procedures used in preparing and installing materials, Maxwell Products assumes no liability for material failure due to improper installation, equipment failure or operator errors. Any remedies are limited, at Maxwell Products' option, to replacement of materials or refund (full or partial) of the purchase price from Maxwell Products. Claims must be made within three (3) months of the date of purchase. There is no other warranty either expressed or implied.

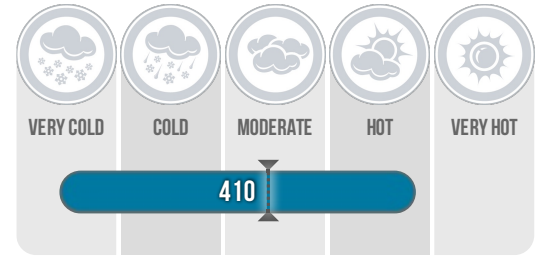

- Performance Range
- ⏸ Suggested Max. Application Temp



Salt Lake City, UT
Toll Free - 800.266.2090
Fax - 800.266.2090

Generated September 5, 2013.
Please visit <http://maxwellproducts.com> for an updated version.